



# Bio Muckspreaders

1200, 1400




K Two Sales, Fowlers Field Farm, Station Road  
Haddenham, Aylesbury, Bucks HP17 8DD  
Tel: +44 (0)1844 299 290 Fax: +44 (0)1844 299 390  
[www.ktwosales.co.uk](http://www.ktwosales.co.uk) [paul@ktwosales.co.uk](mailto:paul@ktwosales.co.uk)

**Making the most of manure.....**

The new K Two Bio is a range of muck spreaders of 12t. - 14t. Capacity which feature twin horizontal beaters, along with a beater hood and spinner deck to finely shred and spread manures up to 24m wide. Built upon the proven principles of the K Two Duo muck spreader chassis, the K Two Bio has additional standard features, such as a sprung drawbar, large tyres, hydraulic slurry door, hydraulic opening rear hood and electronic in cab control of the floor speed as standard. Other standard features of the K Two Bio include wide angle front PTO shaft, individual clutch protection for the beaters and spinners, 1000 rpm driveline and a 60mm diameter rear floor drive shaft.

The wide and even spread pattern achieved by the K Two Bio is an essential tool in today's farming environment, where the spreading of highly nutritious manures such as chicken manure for example, must be carried out with high accuracy and correct timing to reduce the risk of scorching crops or the leaching of manures. Due to its even 24m spread pattern, the K Two Bio is able to achieve these goals by operating on commonly spaced tramlines at 24m and thus reducing the expenditure on expensive artificial fertilisers. The K Two Bio is therefore an asset to any farming business!

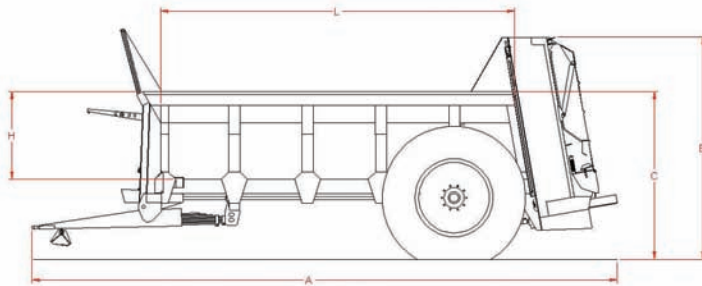

**Technical Specifications**

Model	1200	1400
Carrying Capacity (kg)	12,000	14,000
Volume - Standard (m <sup>3</sup> )	9.5	10.5
Volume - Heaped (m <sup>3</sup> )	15.3	16.8
Standard Wheels	520/85 R38	580/70 R38
No. of bed chains	4	4
Bed Chain Thickness (mm)	14	14
Rear floor drive roller diameter (mm)	60	60
PTO Input Speed (rpm)	1000	1000
Power Requirement (kw/hp)	97 / 130	112 / 150
<b>Dimensions: (mm/ feet)</b>		
A) Overall length	7950 / 26' 2"	8450 / 27' 6"
B) Overall height	3150 / 10' 4"	3150 / 10' 4"
C) Loading height	2300 / 7' 7"	2300 / 7' 7"
L) Internal length	5000 / 16' 5"	5500 / 18' 1"
H) Internal height	1200 / 3' 11"	1200 / 3' 11"
Overall width	2800 / 9' 2"	2920 / 9' 8"
Internal width	1500 / 5'	1500 / 5'
Unladen weight (kg)	4950	5350

**OPTIONAL EXTRAS:** Wooden or steel extension sides, slurry door sight gauge.

Designed to perform



built to last.